

TABLE Fact Sheet

TECHNICAL DATA

	TABLE LINEAR		TABLE RADIAL	
Product	9201	with lamp base	9202	with lamp base
	9203	with clamp	9204	with clamp
	9205	with pin	9206	with pin
Colours	01 black 02 white 23 aluminium			
Dimensions	Height:		300 mm – 750 mm	
	Radius:	100 mm – 650 mm	Radius:	100 mm – 550 mm
	Lamp base: (W × D × H):	250 mm × 250 mm × 8 mm	Lamp base (∅):	250 mm × 8 mm
	Clamp (W × D × H):		90 mm × 75 mm × 100 mm	
	Pin (∅):		90 mm	
Material	Aluminium, zinc, steel (lamp base), plastic			
Weight	6 kg		4,5 kg	
Energy efficiency	This product contains (a) light source(es) with the energy efficiency class(es)			
	Light source no. 16684, energy efficiency class D (Reg. 1314008)			
Protection type	IP 20			
Protection class	III ⬢			
Illuminants				
LED	cold white & warm white LEDs			
Power consumption	8.5 W			
Nennlichtstrom	cold white 875 lm			
Beleuchtungsstärke	> 1.000 lux at a height of 60 cm			
Luminous efficiency	cold white 100 lm/W			
Colour temperature (CCT)	2.700 K / 3.600 / 6.500 K			
Colour reproduction index	≥ 80			
Operating temperature on lamp head	≤ 40°C at 25°C ambient temperature			
Burning life	over 50,000 hours			
Standby consumption	≤ 0.5 W			
Nominal voltage	12–14 V DC			
VITACORE®				
Operation	via VITACORE® electronics			
Light intensity setting	in 5 steps			
Setting of light colour	in 3 steps 2,700 / 3,600 / 6,500 K			
Touch panel	made of acrylic glass			
Power supply unit				
Desktop power supply	Europlug & BS 1363 (British 3-pin) plug			
Cable length	AC 1.2m DC 1.8m			
Power consumption	100–240 V, 50–60 Hz, 1,5 A			
Output	max. 13,5 V DC, 54 W			

TECHNICAL VIEW

TABLE LINEAR
9201

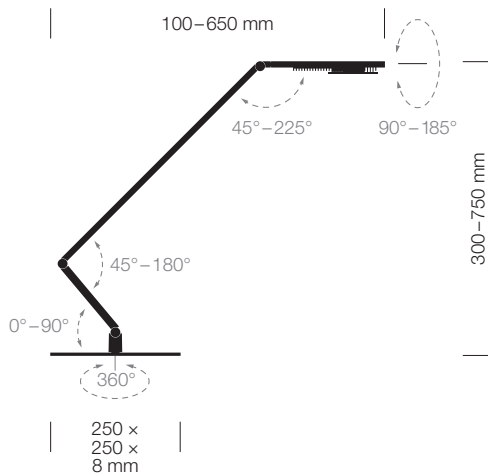


TABLE RADIAL
9202

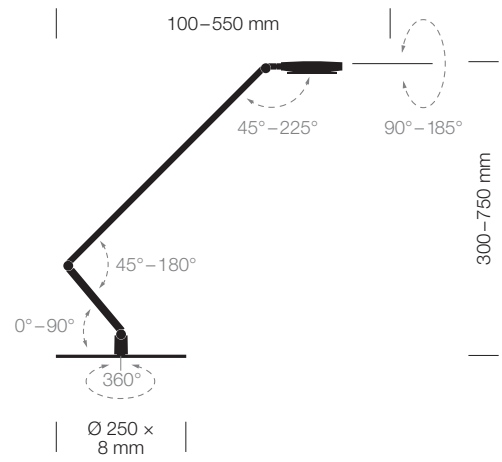


TABLE
CLAMP
9203 LINEAR
9204 RADIAL




TABLE CLAMP (9203 + 9204)
The clamp of LUCTRA® TABLE allows the lamp to be attached to table thickness up to 78mm. It allows wall mounting, too.

TABLE
PIN
9205 LINEAR
9206 RADIAL



TABLE PIN (9205 + 9206)
The LUCTRA® TABLE pin holds the lamp firmly in hole throughputs between 20 and 80mm. With integrated cable management.

LIGHT DISTRIBUTION CURVE

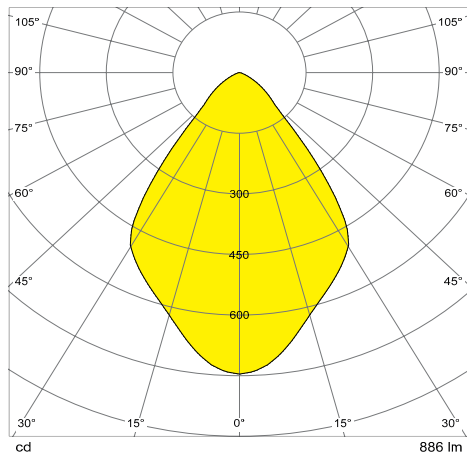

Free download at www.luctra.eu



LUCTRA® is a brand of
DURABLE · Hunke & Jochheim GmbH & Co. KG
Westfalenstraße 77-79 · 58636 Iserlohn
Postfach 1753 · 58634 Iserlohn
Tel.: +49 23 71 66 24 45
info@luctra.eu · www.luctra.eu